

**WARNINGS:**


Not suitable for children under 3 years of age
Maximum capacity of 30kgs
Adult supervision required at all item
Children should be instructed on how to apply brakes before use
This product should not be operated on public roads, highways or bicycle paths
Read 'Safe operation' section before use
Always inspect and maintain product prior to use
The toy should be used with caution since skill is required to avoid falls or collisions causing injury to the user or third parties.

**SAFE OPERATION:**

This product must be assembled by an adult and checked by an adult before use
Ensure nuts and bolts remain securely fastened before use
Lubricate the chain often
Ensure the tyres are pumped up before use – use hand pump only (maximum 30 PSI)
Perform a brake test before use
Do not store in direct sunlight

**Material of products:**

A、 (PP) B、 (IRON)

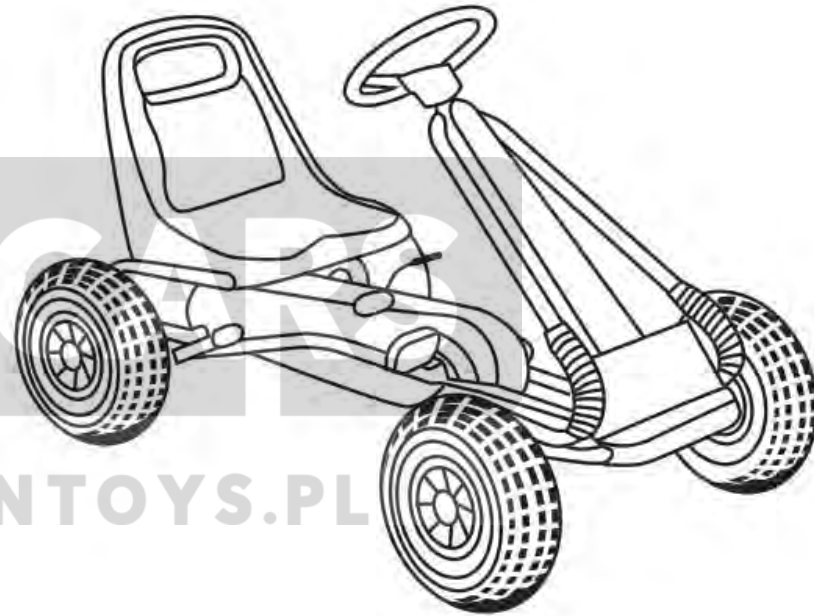**PEDAL GO-KART****Operating Instructions  
and Assembly Manual**

**Execution Standard: EN71-1, -2, -3**

*Please read this manual carefully before use*

Caution: For correct and safe operation of this product, be sure to read this instruction manual carefully before use. Please retain this user manual for future reference.

*Please read this manual c*

**Parts List (included):**



1. One steering wheel



2. One seat



3. One steering shaft



4. One steering support



5. manual

7. Place the steering wheel cover in the centre of the steering wheel.



8. Ensure all nuts and bolts are securely tightened before use, and the tyres are appropriately inflated.



### Assembly Instructions:

1. Attach the steering support to the frame of the go-kart. Fix with M5\*45mm bolts and ensure to use washers where appropriate.




2. Fix the license plate on the front of the go-kart with 2 x bolt 5\*50mm and washers.



3. fix the front panel to the car body according to the photo



4. Insert the steering shaft through the turning pole. Place the front panel over the steering shaft. Please pull this part when you are insert the steering shaft through the turning pole.

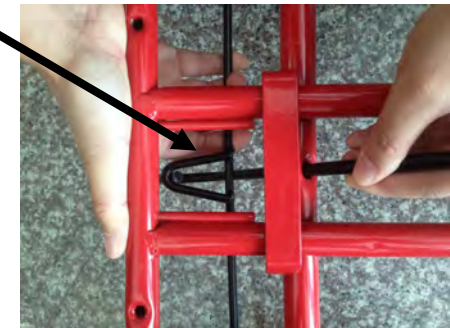

**LEAN CARS**

**WWW.LEANTOYS.PL**

5. Place the steering wheel in place and insert the steering shaft through it and fix with 2 x square washers and M8 nut.



6. Fix the seat to the frame of the go-kart using M5\*40mm bolts, ensure to use washers again where appropriate.



6. One front panel



7. One license plate



8. Bag of nuts and bolts  
(4 x M5\*40mm bolts,  
4 x M5\*45mm bolts,  
2 x M5\*50mm bolts  
4x 5\*14washers  
6x 5\*12washers  
10pcsxM5nuts  
The extra for standby use:  
1pc 5\*14washer  
1pc 5\*12washer  
1pc nut



9. Steering Wheel Cover