

Security considerations

The safety precautions described, is about how to let children can happily and safely use this

Products, please pay attention to read the following safety precautions patiently.

1, the charge must be the adults don't let children own charging operation, charging time is 10 to 12 hours

2, you must drive in adult supervision under the guidance of this car

3, the product must be the adults before assembly or use by adults monitor assembly is correct

4, it is strictly prohibited in public street road slope dangers such as drive to play near the pool

5, the car can't overload capacity 30 kg maximum load

6, this product is only suitable for 37 months to 72 months children to use

7, note parts will be damaged due to improper driving

8, on the road, it is forbidden to suddenly change forward backward switch function should transform in the static switch function.

9, only after the car dirty can wash not rinse clean cloth in order to avoid damage.

10, after the completion of the charger is not a toy collection, please

11, the product is plastic products, please stay away from fire.

12, product when to start, in the process of using the motor produces spark so it is strictly prohibited in the flammable gas station And explosive dangerous area use, etc

13, please pay special attention to don't let children go to a location near the contact wheel or wheels in order to avoid the task of crushed.

The car is in use process please do not close to other children

14, the car is suitable for driving on flat ground, please try to avoid in the land of sediment or uneven.

15, After to dismantle materials that do not give children playing so as not to cause unexpected danger to children.

16, product for children before their guardians have responsibility This content to guide children's correct operation

17, the car seat belt is attached to increase safety consciousness of toys for children do not have such as The safety of the vehicle have role

18, please guide the children how to start the throttle to relax Pedal and default of encounter obstacles how and how to deal with To stop on the local.

19, right into the battery, the attention is negative.

20, removable battery charging heating but not thrown into the fire to avoid short-circuit.

21, the battery pool cannot charge battery charged only under adult supervision

22, remote control distance will shorter when battery power is insufficient at this time, please replace new battery

23, if long time need not when please take out the batteries to avoid leakage corrosion when the batteries should be removed from the body.

24, power terminal shall not be short circuit.


25, the toy car fall off when use may have small parts so don't adapt to 36 months and the following Children use.

Children's electric tricycle

Installation instructions



Parts

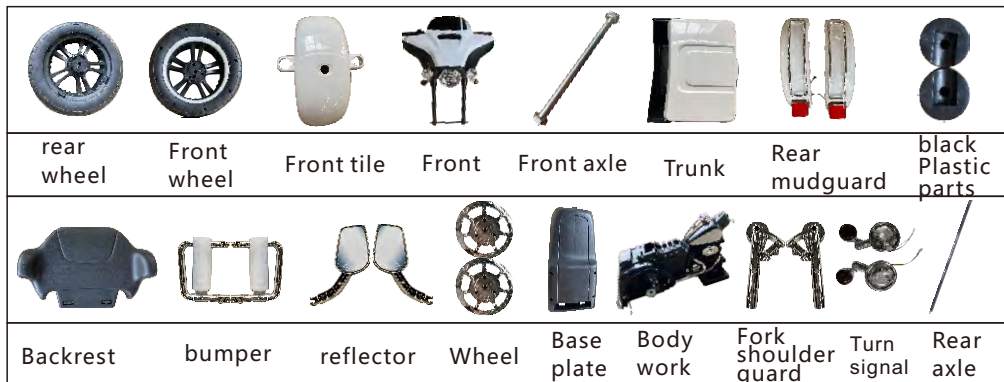

installation steps



Install the front wheel: remove the front axle Press the front tile, and the front fork guard Use screws to tighten the left and right Black plastic parts aligned on the front wheel Hole position as shown in the figure, tighten the screws That's it!




Install the rear wheel: put the rear axle through Into the body. Put the rear wheel in The rear axle clamps the gasket clip , And finally fasten the wheels can;



Install the front: first connect the front with Body line connection, plug the head Into the hole, stuck on the body, Tighten with long screws as shown Just



Install the rear mudguard: first connect the mudguard line with the body line, the excess line is inserted into the hole and stuck in the body Tighten with screws;

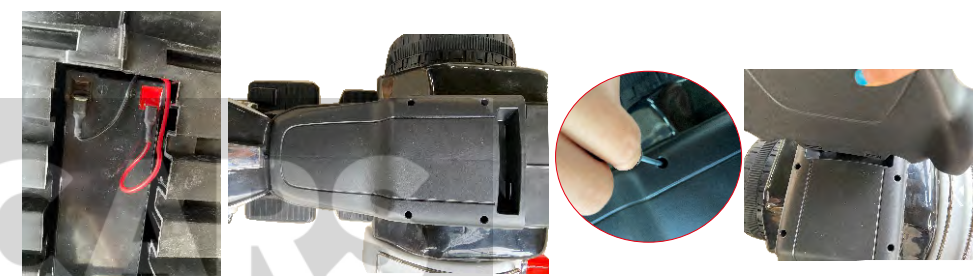

To connect the power cord, first place the seat plate on the body and tighten with screws; then align the backrest with the screws on the rear of the body Just fix it;



Install the trunk: align the trunk At the rear of the car body, tighten with screws can;



Install the mirror: align the mirror with the body Press firmly on it;



Install the bumper: align the bumper on both sides of the body Just tighten it;



Install the turn signal: connect the turn signal line with Body line docking. Tighten with screws